




# VEHICLE LIFT PLANNING GUIDE

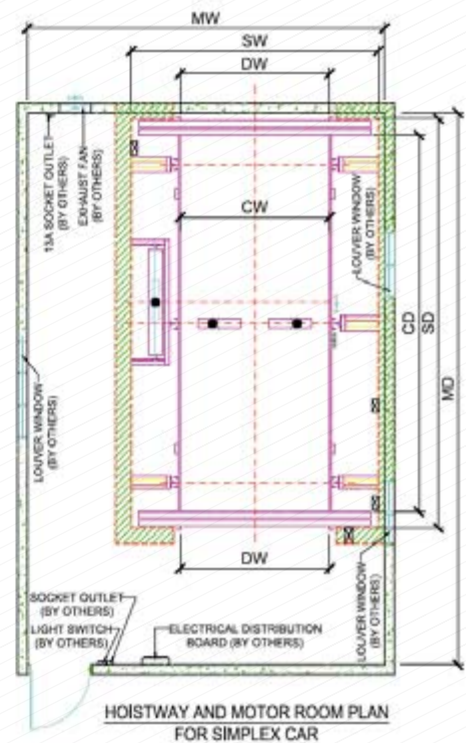

Type	Speed	Capacity	Car Internal Size	Door Size	Optimal Shaft Size	Reaction Load Machine		Impact Load On Pit	
	(m/mm)			Center Opening (Double Entrance)		R1 (Kg)	R2 (Kg)	R3 (Kg)	R4 (Kg)
		(Kg)	CW x CD (mm)	DW x DH (mm)	SW x SD (mm)				
VL 2500	30 / 60	2500	2500 x 5100	4PCO 2500 x 2300	4200 x 5700	14400	13000	28000	22100
VL 3000		3000	2500 x 5300	4PCO 2500 x 2300	4200 x 5900	16600	15400	33000	26400
VL 4000	30	4000	2500 x 5800	4PCO 2500 x 2300	4200 x 6400	18000	16100	34500	27600
VL 5000		5000	2500 x 5800	4PCO 2500 x 2300	4200 x 6400	22800	18000	40800	32800

# VEHICLE LIFT LAYOUT PLAN (DOUBLE ENTRANCES)

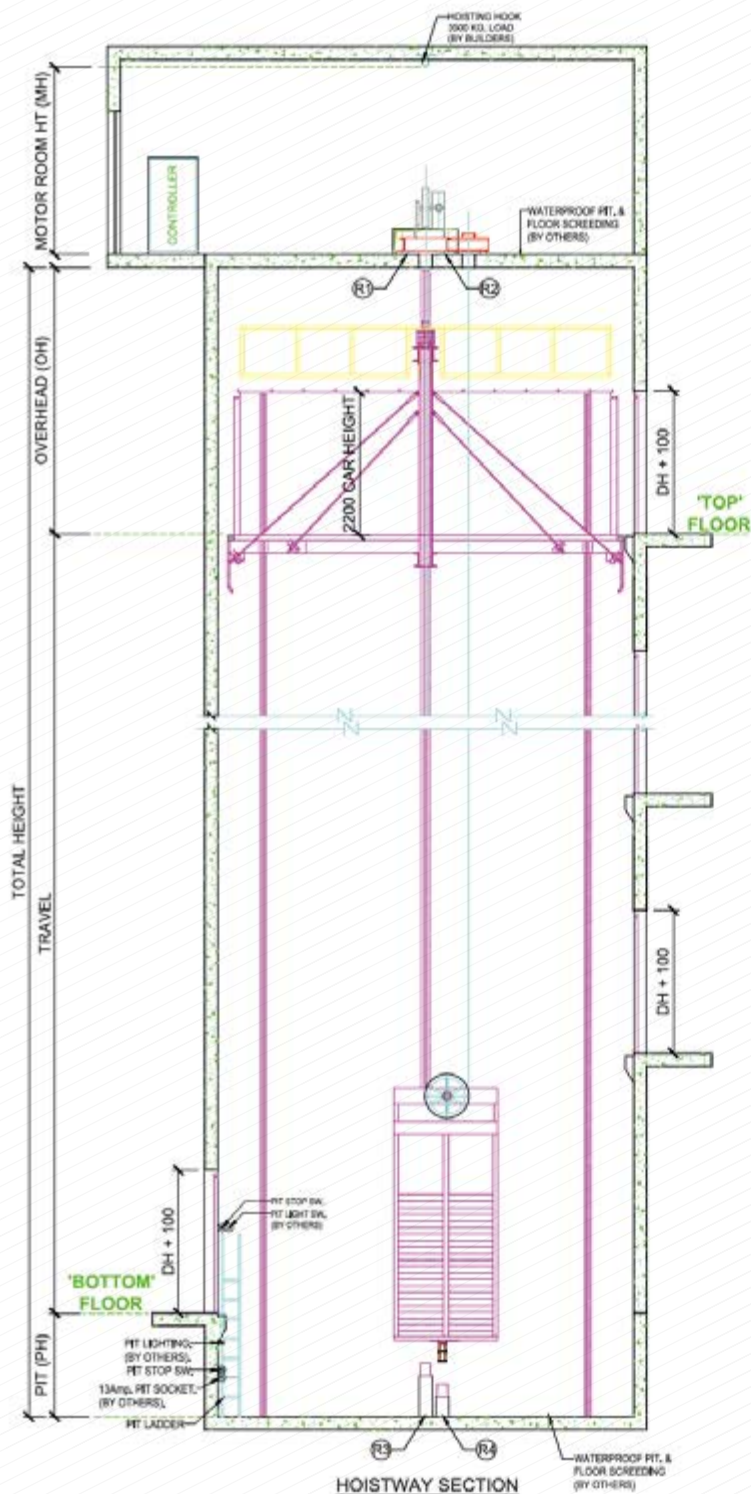

Type	Motor Room Size MW x MD(mm)
2500 - 3000Kg.	5000 x 8000
4000 - 5000Kg.	5000 x 8500

Speed (m / min)	Minimum Overhead OH (mm)	Minimum Pit Depth PH (mm)	Motor Room Height MH (mm)
30 / 60	4850	1600	3000



**Dover Elevators (M) Sdn Bhd**

Address : No 18, Jalan Utara, Off Jalan Imbi,  
55100 Kuala Lumpur.

Tel : 03-2142 6622

Fax : 03-2144 4931

Email : [management@dover-elevators.com.my](mailto:management@dover-elevators.com.my)