

# HOME LIFT

## Standard Features

- Automatic Door Operation
- Overload Protection
- Digital Car Position Display
- Fan / Light Shut Off Automatic
- Intercom System
- Alarm Bell System
- Emergency Light
- Photo Curtain Protection
- In Car Lockout
- Hall Call System With Main Hall Lockout



## Standard Finishes

### SIDE AND REAR WALLS

- Hairline Stainless Steel
- Clear / Frosted Glass With Hairline Stainless Steel Frame

### FLOORING

- Vinyl Tiles

### CEILING

- Combination Of Perspex And Hairline Stainless Steel With Laser Cut Panel

### LANDING DOOR

- Hairline Stainless Steel
- Clear / Frosted Glass With Hairline Stainless Steel Frame

### JAMB

- Narrow Hairline Stainless Steel


# HOME LIFT




## Ceilings




**DMD-008**

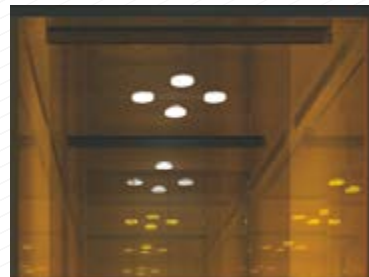

**DMD-009**

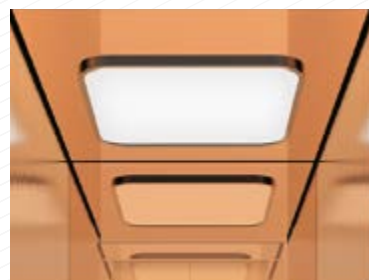

**DMD-010**

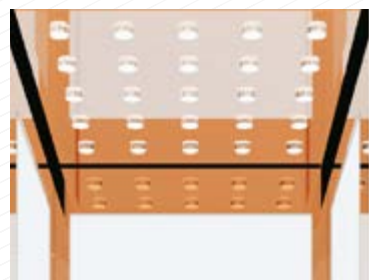

**DMD-011**

# HOME LIFT

## Car Signal Fixtures



DMC-009



DMC-010 (optional)



## Hall Signal Fixtures



DMH-014




DMH-015 (optional)



DMH-016 (optional)

# HOME LIFT LAYOUT PLAN

TECHNICAL FEATURES	
Type	: Machine Roomless
Capacity	: 250kg to 400kg
Speed	: 24 mpm
Maximum Car Area	: 1.6 m <sup>2</sup>
Travel	: Up to 12m
Minimum Overhead	: 3800mm
Minimum Pit Depth	: 700mm
Main Power Supply	: Single Phase 240VAC 50Hz or Three Phase 415VAC 50Hz
Shaft	: Construction Wall

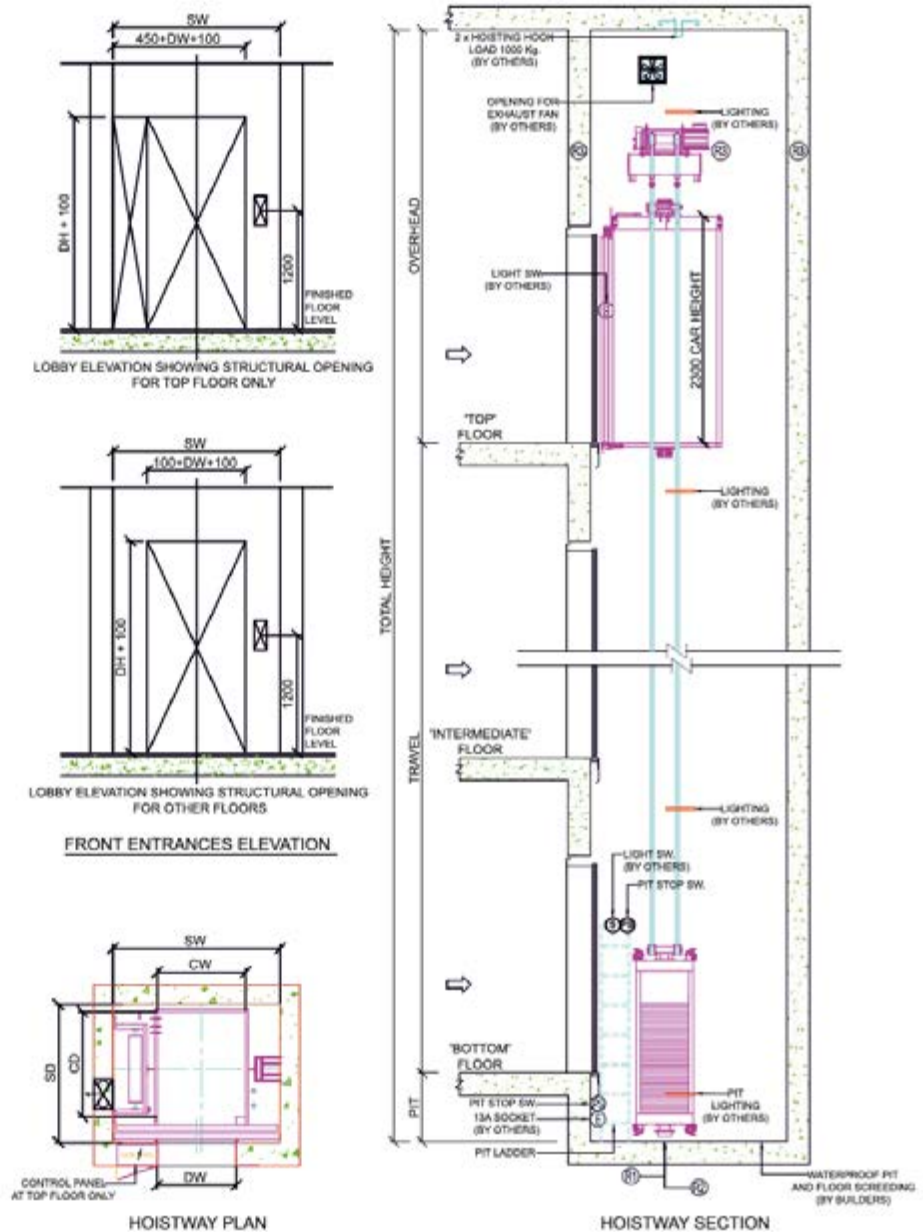

Capacity	Speed	Car Internal Size	Door Size Centre Opening	Minimum Shaft Size	Inverter/ Motor	Shaft Wall Load	Buffer Reaction Load	
(Kg)	(m / min)	CW x CD (mm)	DW x DH (mm)	SW x SD (mm)	(KW)	R3 (Kg)	R1 (Kg)	R2 (Kg)
250	24	900 x 1200	800 x 2100	1800 x 1500	1.0	1900	2500	3600
320		900 x 1300	800 x 2100	1800 x 1600	1.0	2100	2600	3700
400		1000 x 1200	900 x 2100	2000 x 1500	1.2	2300	2700	3800



**Dover Elevators (M) Sdn Bhd**

Address : No 18, Jalan Utara, Off Jalan Imbi,  
55100 Kuala Lumpur.

Tel : 03-2142 6622

Fax : 03-2144 4931

Email : [management@dover-elevators.com.my](mailto:management@dover-elevators.com.my)